

ES-SERIES photovoltaic modules



A range of high quality poly-crystalline solar panels for on-grid markets offering exceptional performance, extraordinary versatility and industry-leading environmental credentials based on our cutting-edge String Ribbon™ wafer technology.

- Best-in-class performance ratings proven by field installations
- 98% of rated power guaranteed for 180, 190W product; 100% guaranteed for 195W product
- 5 year workmanship and 25 year power warranty for ultimate peace of mind*
- More installation versatility with our extensive range of mounting options
- Higher strength with wind and snow loads guaranteed up to 80 lbs/ft²
- Tested to all major industry certifications and regulatory standards
- Smallest carbon foot-print leading the fight against global warming
- Quickest energy payback time for the maximum energy conservation
- Cardboard-free packaging for minimal on-site waste and disposal cost

Electrical Characteristics

Standard Test Conditions (STC)¹

| | | ES-180 RL-T or RL-TU SL-K or SL-KU* | ES-190 RL-T or RL-TU SL-K or SL-KU* | ES-195 RL-T or RL-TU SL-K or SL-KU* |
|-----------------|-----|---|---|---|
| P_{mp}^2 | (W) | 180 | 190 | 195 |
| $P_{tolerance}$ | (%) | -2/+3 | -2/+2.5 | -0/+2.5 |
| $P_{mp, max}$ | (W) | 186.1 | 194.9 | 199.9 |
| $P_{mp, min}$ | (W) | 176.4 | 186.2 | 195.0 |
| P_{ptc}^3 | (W) | 159.7 | 168.8 | 173.3 |
| V_{mp} | (V) | 25.9 | 26.7 | 27.1 |
| I_{mp} | (A) | 6.95 | 7.12 | 7.20 |
| V_{oc} | (V) | 32.6 | 32.8 | 32.9 |
| I_{sc} | (A) | 7.78 | 8.05 | 8.15 |

Nominal Operating Cell Temperature Conditions (NOCT)⁴

| | | | | |
|------------|------|-------|-------|-------|
| P_{mp} | (W) | 129.0 | 136.7 | 140.1 |
| V_{mp} | (V) | 23.3 | 23.8 | 23.9 |
| I_{mp} | (A) | 5.53 | 5.75 | 5.86 |
| V_{oc} | (V) | 29.8 | 30.3 | 30.5 |
| I_{sc} | (A) | 6.20 | 6.46 | 6.59 |
| T_{NOCT} | (°C) | 45.9 | 45.9 | 45.9 |

¹ 1000 W/m², 25°C cell temperature, AM 1.5 spectrum;

² Maximum power point or rated power

³ At PV-USA Test Conditions: 1000 W/m², 20°C ambient temperature, 1 m/s wind speed

⁴ 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum

* RL-T and SL-K models suitable for use only in systems where the DC negative pole of the array is hard grounded; RL-TU and SL-KU models suitable for use in electrically ungrounded systems where local regulation allows

Low Irradiance

The typical relative reduction of module efficiency at an irradiance of 200W/m² in relation to 1000W/m² both at 25°C cell temperature and spectrum AM 1.5 is 0%.

Temperature Coefficients

| | | |
|----------|---------|-------|
| P_{mp} | (%/ °C) | -0.49 |
| V_{mp} | (%/ °C) | -0.47 |
| I_{mp} | (%/ °C) | -0.02 |
| V_{oc} | (%/ °C) | -0.34 |
| I_{sc} | (%/ °C) | 0.06 |

System Design


| | |
|---------------------------------|-------|
| Series Fuse Rating ⁵ | 15 A |
| UL Rated System Voltage | 600 V |

⁵ Also known as Maximum Reverse Current



ELECTRICAL EQUIPMENT
CHECK WITH YOUR INSTALLER

Mechanical Specifications

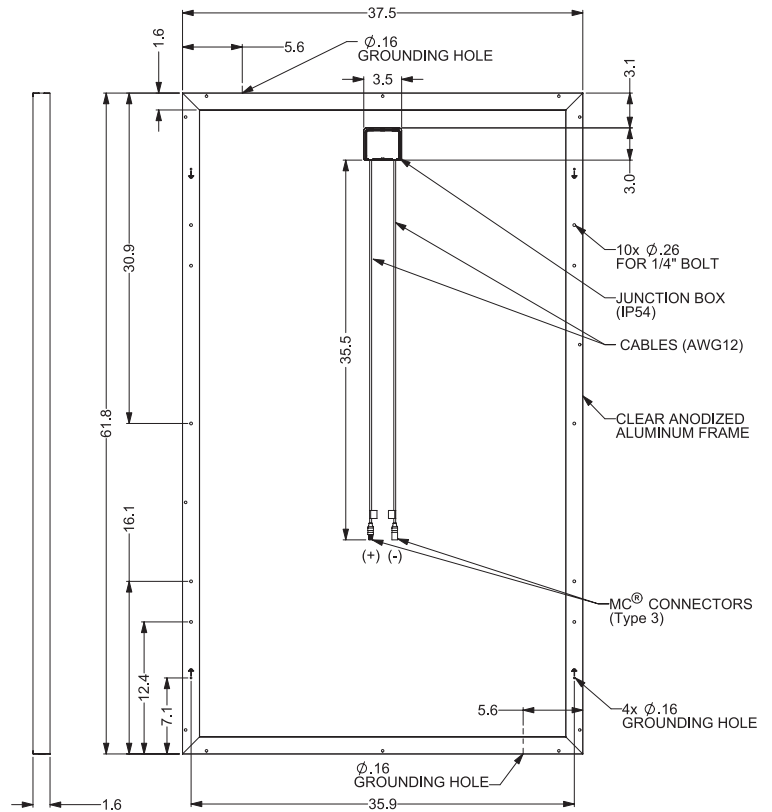

All dimensions in inches; module weight 40.1 lbs

Product constructed with 108 poly-crystalline silicon solar cells, anti-reflective tempered solar glass, EVA encapsulant, polymer back-skin and a double-walled anodized aluminum frame. Product packaging tested to International Safe Transit Association (ISTA) Standard 2B and DIN EN ISO Standards 12048, 13355, 2244, 10531. All specifications in this product information sheet conform to EN50380. See the **Evergreen Solar Safety, Installation and Operation Manual** and **Mounting Design Guide** for further information on approved installation and use of this product. Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without notice. No rights can be derived from this product information sheet and Evergreen Solar assumes no liability whatsoever connected to or resulting from the use of any information contained herein.

Partner:

S195_US_010408; effective April 1st 2008